

# Instruction Manual XX240-30

## Introduction

The information in this manual covers the installation of the H264-ENCDR-WM Wall Mount for the H264-ENCDR Digital Video Encoder and KRX-3 Video Decoder. This unit should be installed by a qualified technician using approved materials in accordance with national, state and local codes. Read these instructions through completely before attempting installation.

If the H264-ENCDR/KRX-3 is to be mounted onto a wall or vertical surface, H264-ENCDR-WM Wall Mount is used. Refer to instruction manual XX240/XX184 for complete installation instructions for the H264-ENCDR/KRX-3.

## Installation

The H264-ENCDR-WM Wall Mount is designed to be attached with No. 8 wall anchors with screws or lag screws. Cabling for power, control, and video must be run to the installation site before the mount is installed. Use the following procedure to install the H264-ENCDR-WM. Refer to Figure 1.

**Note:** Verify that the selected mounting location is free of obstacles such as wiring or pipes.

1. Using two (2) of the screws provided, attach one of the brackets to the side of the H264-ENCDR/KRX-3. Two tapped holes are provided on the side of the unit. Attach the second bracket to the other side of the unit. Either bracket can be used for each side.
2. Select a mounting location that meets the requirements for support and access. Each unit weighs 2.25 lb (1.0 kg). If it hasn't already been done, route the cables to the installation site. Be sure to leave enough slack for wiring ease. Secure the H264-ENCDR-KRX-3/brackets to the wall with hardware appropriate for the wall material. The H264-ENCDR/KRX-3 can be mounted in any orientation that is convenient for wiring and access for the particular installation requirements. Make connections as outlined in instruction manual XX240/XX184.

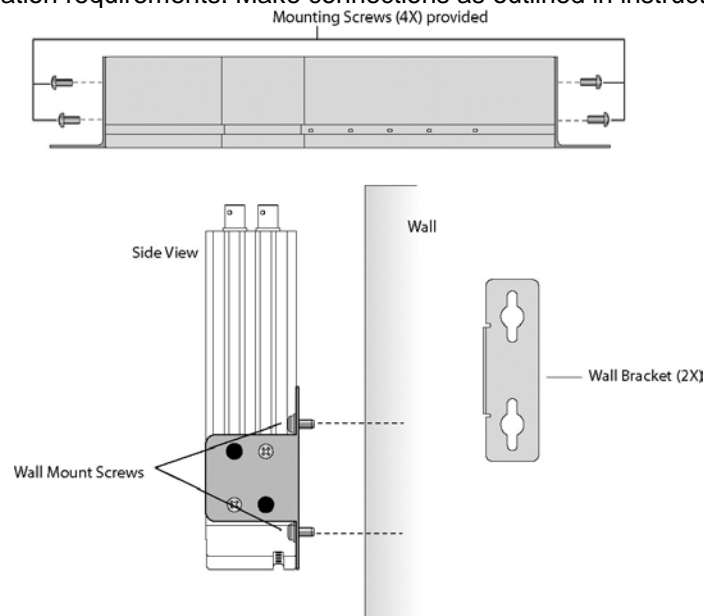


Figure 1

### Installing the H264-ENCDR-WM

Copyright © 2012 Vicon Industries Inc. All rights reserved.  
Vicon and its logo are registered trademarks of Vicon Industries Inc.  
Product specifications subject to change without notice.

VICON INDUSTRIES INC., 89 ARKAY DRIVE, HAUPPAUGE, NEW YORK 11788  
TEL: 631-952-2288 FAX: 631-951-2288 TOLL FREE: 800-645-9116  
24-Hour Technical Support: 800-34-VICON (800-348-4266)  
UK: +44/(0) 1489-566300 WEB: [www.vicon-security.com](http://www.vicon-security.com)

## **Vicon Industries Inc.**

### **Corporate Headquarters**

89 Arkay Drive  
Hauppauge, New York 11788  
631-952-2288 800-645-9116  
Fax: 631-951-2288

### **Vicon Europe Headquarters**

Brunel Way  
Fareham, PO15 5TX  
United Kingdom  
+44 (0) 1489 566300  
Fax: +44 (0) 1489 566322

### **Vicon Germany**

Kornstieg 3  
D-24537 Neumuenster  
Phone: +49 (0) 4321 8790  
Fax: +49 (0) 4321 879 97

### **Far East Office**

Unit 5, 17/F, Metropole Square  
2 On Yiu Street, Shatin  
New Territories,  
Hong Kong  
(852) 2145-7118  
Fax: (852) 2145-7117

**Internet Address: [www.vicon-security.com](http://www.vicon-security.com)**

