



Important


Note: These instructions are for the registration of ViconNet® JUMP version 6.6 only.

When the free ViconNet JUMP software is downloaded from Vicon's website, www.vicon-security.com, it has to be registered. To register the software, you must provide a MAC address for the PC the software will be installed on – the PC that will be the NVR. You will then receive the software and a license in an email.

Important Note: The JUMP license only allows for one Network Interface Card (NIC)/MAC address. If your computer has more than one NIC, it will have more than one MAC address. You must select which NIC/MAC you will use and **disable** any other non-active NIC(s).

How to find the MAC Address:

1. Click the *Start* button and select the *Control Panel*.
2. Select *Network and Sharing Center* (Windows® 7; *Network Connections* in Windows XP).
3. Click *Change adapter settings* (Windows 7).

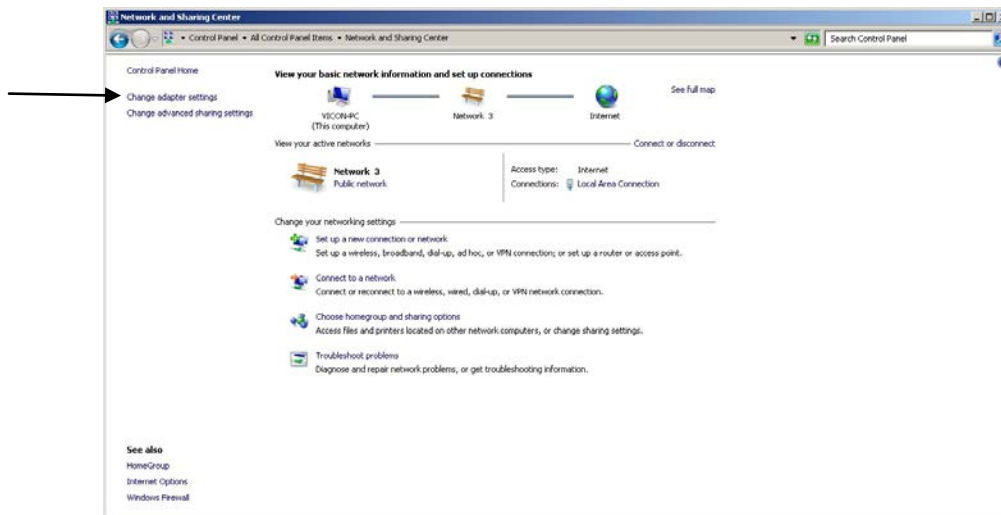


Copyright © 2012 Vicon Industries Inc. All rights reserved.
Product specifications subject to change without notice.
Vicon, ViconNet and their logos are registered trademarks of Vicon Industries Inc.



VICON INDUSTRIES INC., 89 ARKAY DRIVE, HAUPPAUGE, NEW YORK 11788
TEL: 631-952-2288 FAX: 631-951-2288 TOLL FREE: 800-645-9116
24-Hour Technical Support: 800-34-VICON (800-348-4266)
UK: +44 (0) 1489 566300 WEB: www.vicon-security.com

Vicon part number 8009-8255-00-00 Rev 512

- Right click *Local Area Connection* (Windows 7; double click in Windows XP).

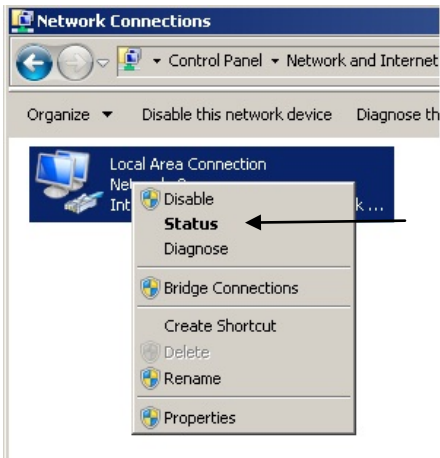


- Select *Status* (Support in Windows XP) and then *Details*.

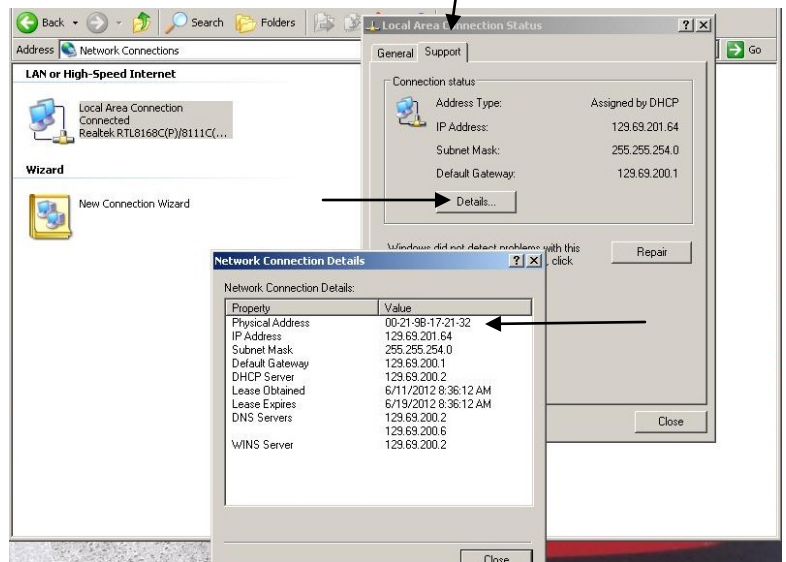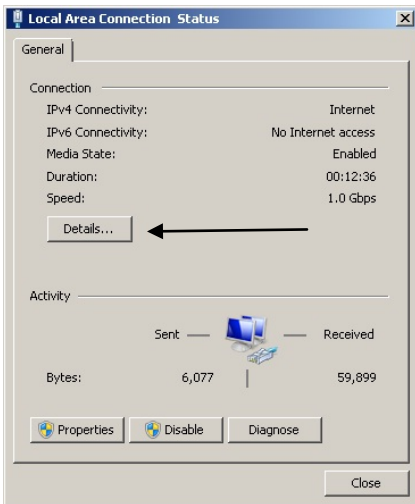

Windows XP example for MAC Address

- The *Physical Address* is displayed in the list of details; this is your MAC address.

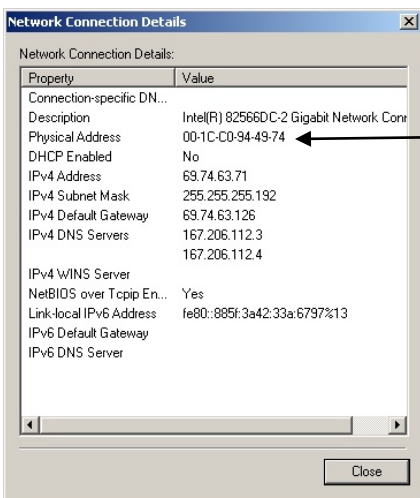

How to Register:

1. To register your ViconNet JUMP software, go to Vicon's website, www.vicon-security.com.
2. From the Support tab, select Software Registration from the dropdown list; select ViconNet JUMP. The following registration form displays.

The screenshot shows the Vicon website's navigation menu with the 'Support' tab highlighted. The main content area is titled 'ViconNet Jump Registration and Download'. It includes a list of services on the left, a navigation menu at the top, and a registration form at the bottom. The form fields include First Name, Last Name, Company Name, Country (set to United States), Phone, Email, Description (set to '<- Please Choose ->'), and MAC Address. A 'Terms & Conditions' section is also present, with a checkbox for 'I have read and agree to the above terms & conditions' and a 'Submit' button.

VICON

International | Contact Us | Sales Login | Search

About Us | Vertical Markets | Products | Sales | **Support** | Resources | Education

Support

ViconNet Jump Registration and Download

Prior to downloading a free copy of ViconNet JUMP Software, Vicon's open-platform VMS for up to six ONVIF cameras, you must complete the registration form below and agree to the terms of ViconNet's licensing agreement. Software registration and installation is a two-step process.

1. Immediately upon submitting the form, you will be provided with a link to download ViconNet JUMP software. Follow the directions provided to install it on the PC that will be serving as an NVR. (For PC hardware requirements - click here). If you are an existing Vicon customer and already have an operational version of ViconNet 6.6 (regardless of whether it's JUMP, ZONE or PEAK), you may skip the download process, but you must still complete the registration form below.
2. After downloading the software, you must also download and install the registration licensing file, which will be provided via an email sent to the address that you provide in the below form. You should receive the email shortly after your form is submitted.

IMPORTANT: The registration licensing file will allow you to use ViconNet JUMP only on the computer with the MAC address provided within the registration form. If you wish to install ViconNet JUMP on any additional computers, you will need to repeat the registration process and receive another licensing file with the corresponding MAC address.

Please note that support for this software package is provided exclusively via our online [knowledgebase](#) and [help forum](#). Phone support is not provided for this free software. Manuals, specifications and other documentation can be found within "Products" section of the this website.

Click here for information about how to find your MAC address, which is required to complete the form. Enter it in the form below using this format: **00-11-22-33-44-55**. BE SURE TO PROVIDE US WITH THE MAC ADDRESS OF THE PC THAT WILL BE SERVING AS AN NVR -- WHICH MAY BE A DIFFERENT COMPUTER THAN THE ONE YOU ARE USING NOW TO PERFORM THIS REGISTRATION PROCESS.

First Name:*

Last Name:*

Company Name:*

Country: United States

Phone:*

Email:*

Description:* <- Please Choose ->

MAC Address:*

Terms & Conditions:

License

IMPORTANT: READ BEFORE INSTALLING THE SOFTWARE

Vicon Industries Inc.® and Subsidiaries/ ViconNet® Software License Agreement

I have read and agree to the above terms & conditions

Submit

SIA © 2012 Vicon All rights reserved | Sitemap

3. Complete the form and accept the terms of Vicon's licensing agreement. Click Submit.

4. You will be directed to a webpage that provides a link to download ViconNet JUMP software. Copy the zip file to the PC that will be your NVR. Within the zip file, you will find the setup.exe file to download the JUMP software. Follow the prompts to install it.
5. After downloading the software, you must download and install the registration license file, which will also be sent via an email as a zip file. Copy the zip file to the NVR. Within the zip file is your license and a program to install it. Extract the files for installation; click on the RegisterFreeNVR.exe file.

Retain the license for your records. It may be required at a later date in the event of a loss of registration.

Note: *The registration licensing file will allow you to use ViconNet JUMP only on the computer with the MAC address provided on the registration form. If any additional PCs require JUMP, or you are an existing customer and already have an operational version of ViconNet 6.6, you can use that same file for the software, but the registration process must be repeated and you will receive another license.*

CAUTION: *After your ViconNet JUMP NVR is registered, the storage database must be configured. If this is not done, the default settings may not be adequate storage to handle the requirements of the installation. Refer to the Quick Manual or Configuring Storage Database Utilities in Chapter 3 of the Software Manual that is available on Vicon's website: www.vicon-security.com.*